




Vertical Type Cube Ice Machine

Features


- Freestanding vertical cube ice machine for bars, prep areas, and beverage service.
- Produces up to 80 lb / 24 hr (36 kg) to cover daily drink, prep, and rush-period demand.
- Built-in bin stores 33 lb (15 kg), so fresh ice is ready at the machine.
- Makes full or half cube options for standard beverage service, matching the ice style shown in the catalogue ice-shape guide.
- About 15 min per cycle helps replenish ice during steady service periods.

Size (Inch):	19.69 in W x 17.72 in D x 35.43 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (2.82 oz)
Rated Amp, Voltage, Power	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W
Certification	DOE, ETL, NSF
Ice Production	80 lb / 24 hr (36 kg)
Max Storage Bin Capacity	33 lb (15 kg)
Ice Shape & Size	Cube: full / half
Ice Making Time / Cycle	Approx. 15 min / cycle
Ice Release Method	Built-in bin
Materials	304 SS, ABS, PE liner, galv. rear
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	80 lb (36 kg)
Warranty	3 Year Parts & Labour

- Air-cooled R290 refrigeration supports efficient output without water-cooled plumbing.
- Runs on 110 V / 60 Hz / 1 Ph with 3.5 A draw and 350 W rated power.
- 304 SS, ABS, PE liner, galv. rear construction combines stainless panels with food-grade internal liner materials.
- Polyurethane foam with Cyclopentane (CFC-free) helps limit heat gain and maintain stored ice quality.
- DOE, ETL, NSF compliance package supports commercial specification requirements.

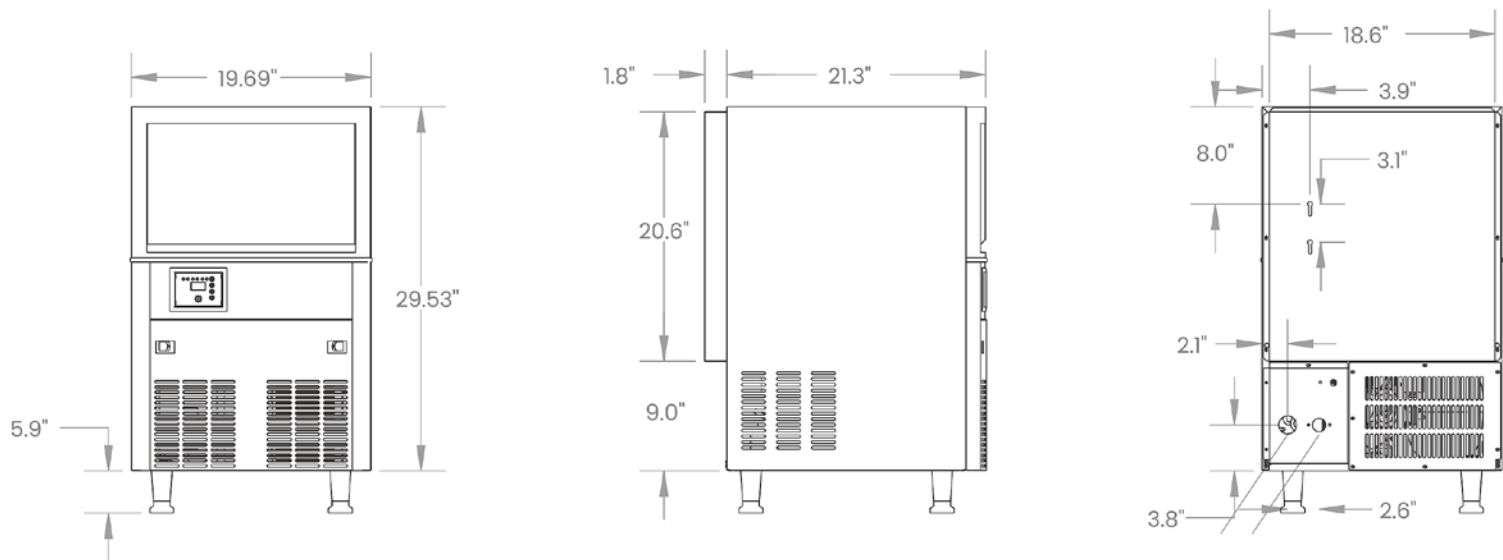

ACIM-80-33
Technical Drawing

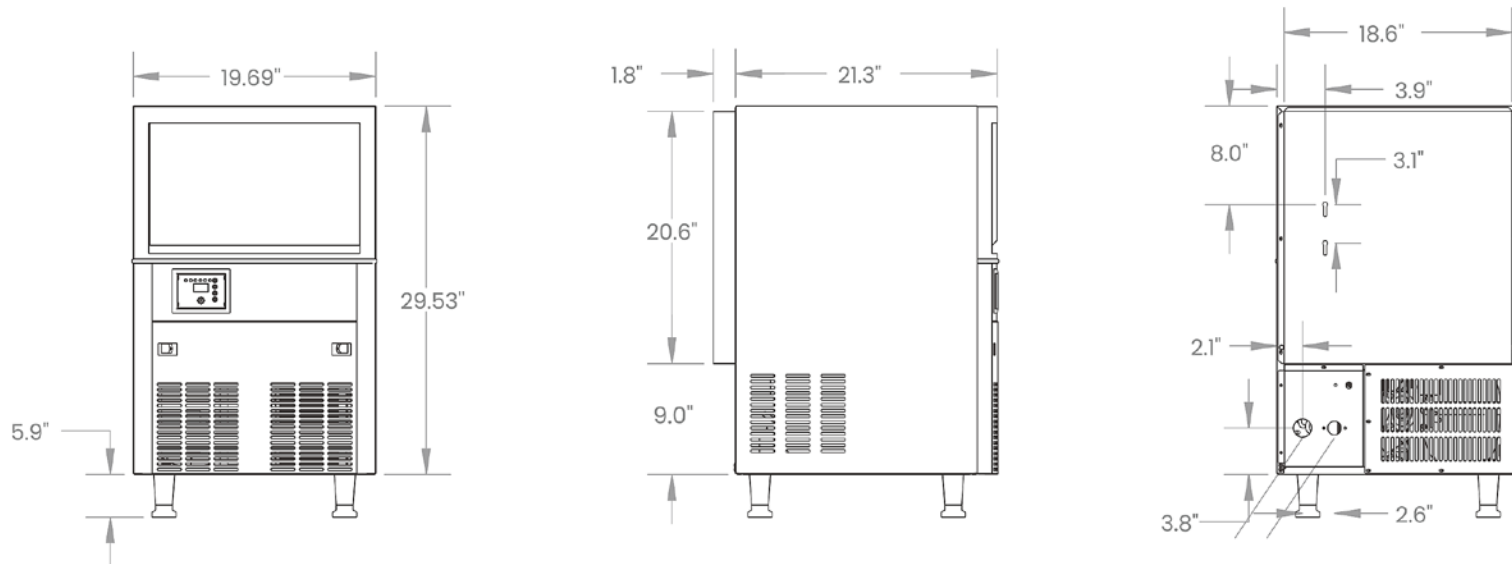

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)



- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency






Vertical Type Cube Ice Machine

Features


- Freestanding vertical cube ice machine for bars, prep areas, and beverage service.
- Produces up to 120 lb / 24 hr (55 kg) to cover daily drink, prep, and rush-period demand.
- Built-in bin stores 40 lb (18 kg), so fresh ice is ready at the machine.
- Makes full, half, or large cube options for different beverage styles, matching the ice style shown in the catalogue ice-shape guide.
- About 15 min per cycle helps replenish ice during steady service periods.

Size (Inch):	19.69 in W x 23.23 in D x 35.43 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (3.70 oz)
Rated Amp, Voltage, Power	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W
Certification	DOE, ETL, NSF, NRCan
Ice Production	120 lb / 24 hr (55 kg)
Max Storage Bin Capacity	40 lb (18 kg)
Ice Shape & Size	Cube: full / half / large
Ice Making Time / Cycle	Approx. 15 min / cycle
Ice Release Method	Built-in bin
Materials	304 SS, ABS, PE liner, galv. rear
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	99 lb (45 kg)
Warranty	3 Year Parts & Labour

- Air-cooled R290 refrigeration supports efficient output without water-cooled plumbing.
- Runs on 110 V / 60 Hz / 1 Ph with 3.5 A draw and 400 W rated power.
- 304 SS, ABS, PE liner, galv. rear construction combines stainless panels with food-grade internal liner materials.
- Polyurethane foam with Cyclopentane (CFC-free) helps limit heat gain and maintain stored ice quality.
- DOE, ETL, NSF, NRCan compliance package supports commercial specification requirements.

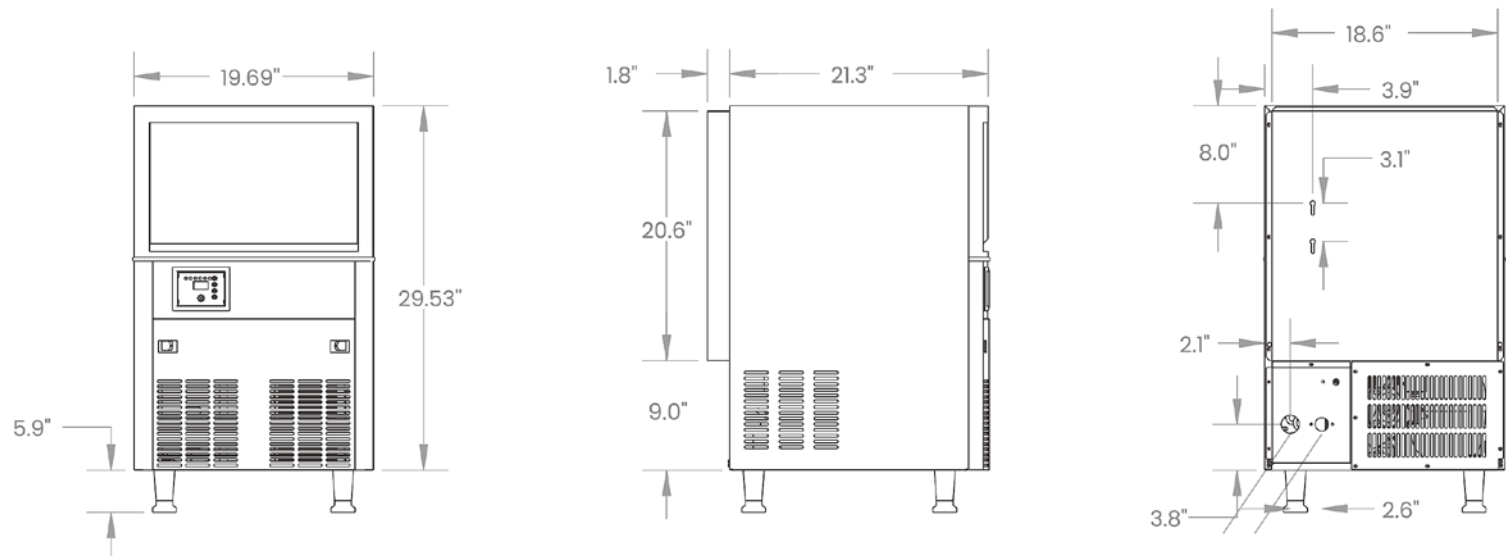

ACIM-120-40
Technical Drawing

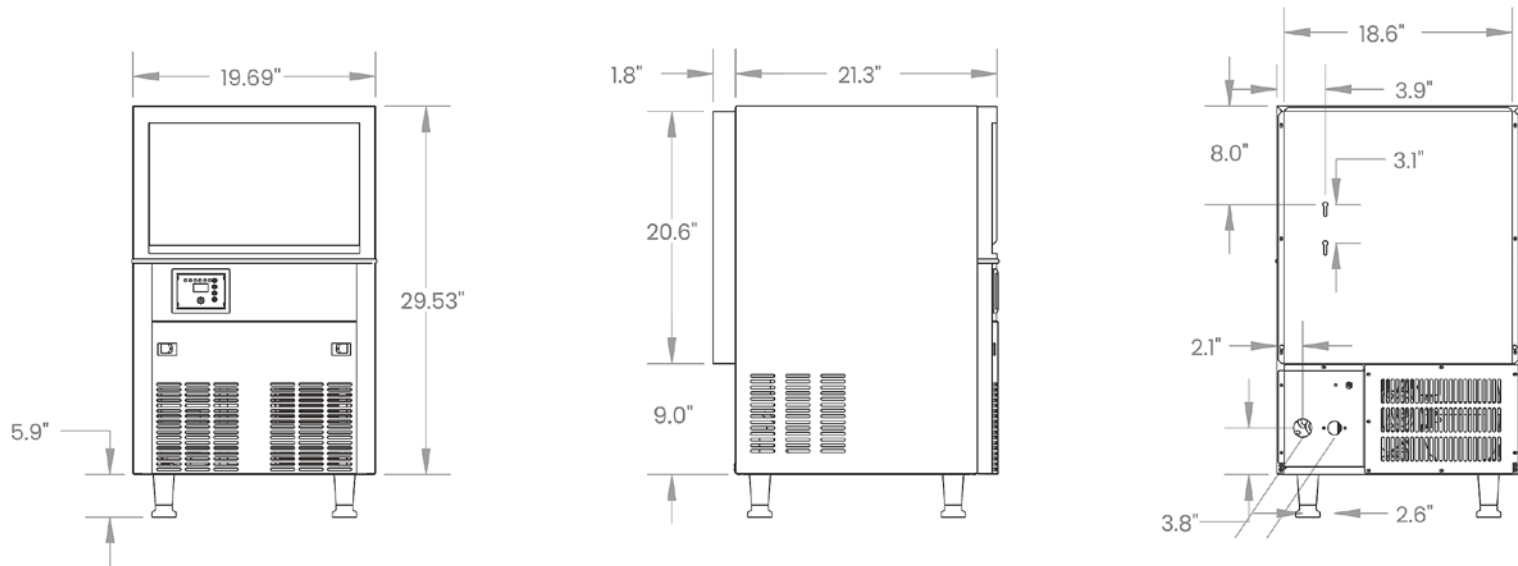

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)



- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency








Vertical Type Cube Ice Machine

Features




- Freestanding vertical cube ice machine for bars, prep areas, and beverage service.
- Produces up to 210 lb / 24 hr (95 kg) to cover daily drink, prep, and rush-period demand.
- Built-in bin stores 80 lb (36 kg), so fresh ice is ready at the machine.
- Makes full, half, or large cube options for different beverage styles, matching the ice style shown in the catalogue ice-shape guide.
- About 15 min per cycle helps replenish ice during steady service periods.

Size (Inch):	26 in W x 26.96 in D x 38.18 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (4.23 oz)
Rated Amp, Voltage, Power	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W
Certification	DOE, ETL, NSF, NRCan
Ice Production	210 lb / 24 hr (95 kg)
Max Storage Bin Capacity	80 lb (36 kg)
Ice Shape & Size	Cube: full / half / large
Ice Making Time / Cycle	Approx. 15 min / cycle
Ice Release Method	Built-in bin
Materials	304 SS, ABS, PE liner, galv. rear
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	276 lb (125 kg)
Warranty	3 Year Parts & Labour

- Air-cooled R290 refrigeration supports efficient output without water-cooled plumbing.
- Runs on 110 V / 60 Hz / 1 Ph with 5.8 A draw and 526 W rated power.
- 304 SS, ABS, PE liner, galv. rear construction combines stainless panels with food-grade internal liner materials.
- Polyurethane foam with Cyclopentane (CFC-free) helps limit heat gain and maintain stored ice quality.
- DOE, ETL, NSF, NRCan compliance package supports commercial specification requirements.

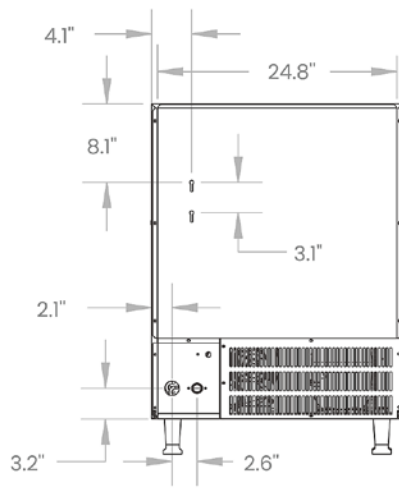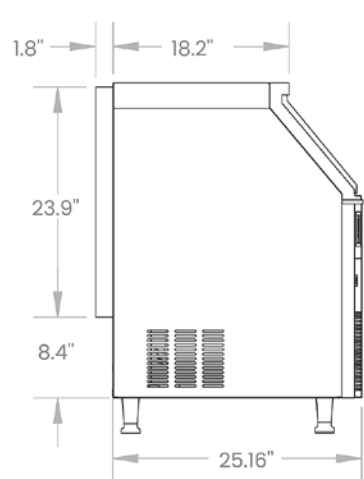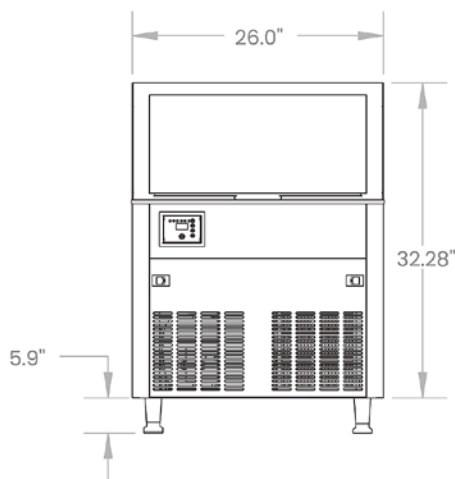

ACIM-210-80
Technical Drawing

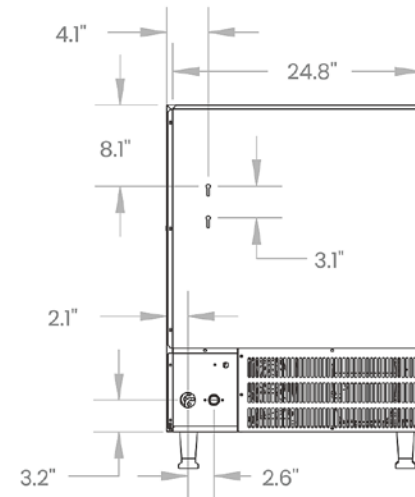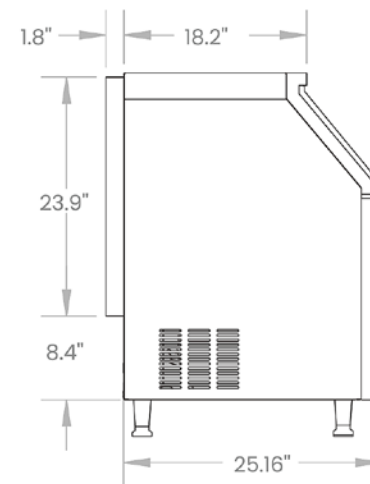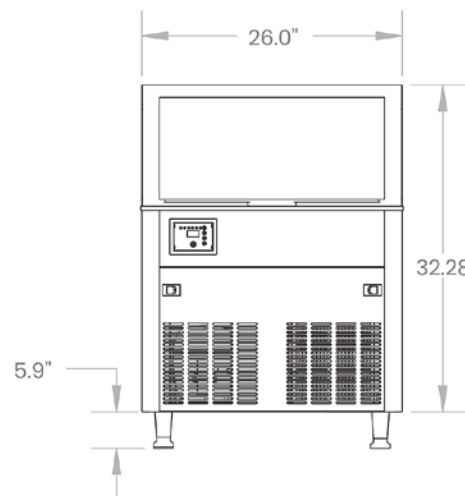

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)



- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency







Stackable Modular Cube Ice Machine

Features



- Stackable modular cube system sized for heavier foodservice demand.
- Produces up to 350 lb / 24 hr (160 kg) to cover daily drink, prep, and rush-period demand.
- Matched storage bin holds 300 lb (136 kg), giving staff a larger reserve between harvests.
- Makes full, half, or large cube options for different beverage styles, matching the ice style shown in the catalogue ice-shape guide.
- About 15 min per cycle helps replenish ice during steady service periods.

Size (Inch):	22 in W x 33.8 in D x 68.7 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (4.76 oz)
Rated Amp, Voltage, Power	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W
Certification	DOE, ETL, NSF, NRCan
Ice Production	350 lb / 24 hr (160 kg)
Max Storage Bin Capacity	300 lb (136 kg)
Ice Shape & Size	Cube: full / half / large
Ice Making Time / Cycle	Approx. 15 min / cycle
Ice Release Method	Bin drop / storage bin
Materials	SUS304/316/430 SS + plastic
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	115 lb + 73 lb (52 + 33 kg)
Warranty	3 Year Parts & Labour

- Air-cooled R290 refrigeration supports efficient output without water-cooled plumbing.
- Runs on 110 V / 60 Hz / 1 Ph with 8.51 A draw and 780 W rated power.
- SUS304/316/430 SS + plastic construction supports frequent bin loading and daily foodservice use.
- Polyurethane foam with Cyclopentane (CFC-free) helps limit heat gain and maintain stored ice quality.
- DOE, ETL, NSF, NRCan compliance package supports commercial specification requirements.

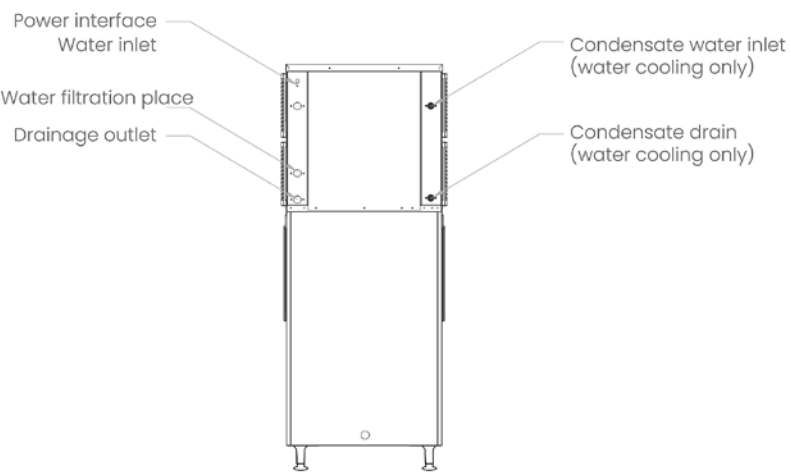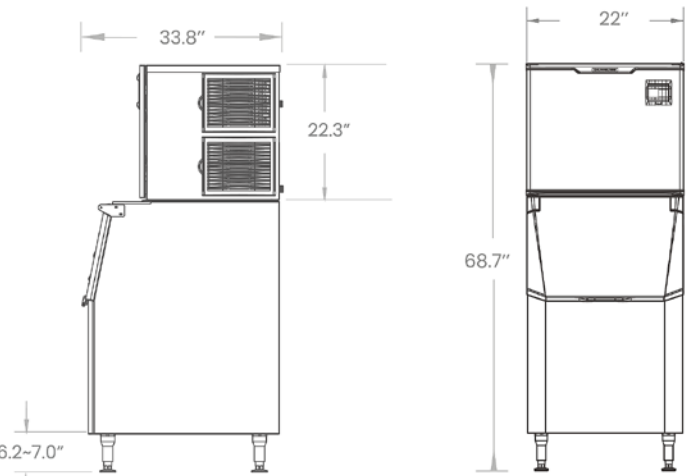

ACIM-350-440
Technical Drawing

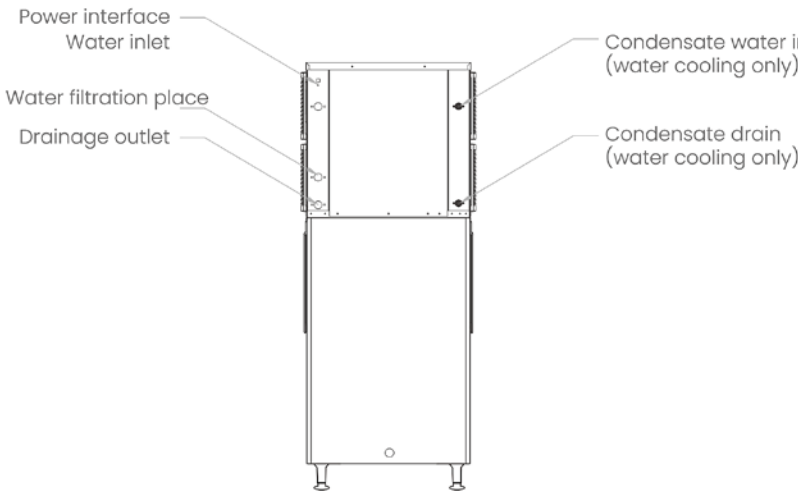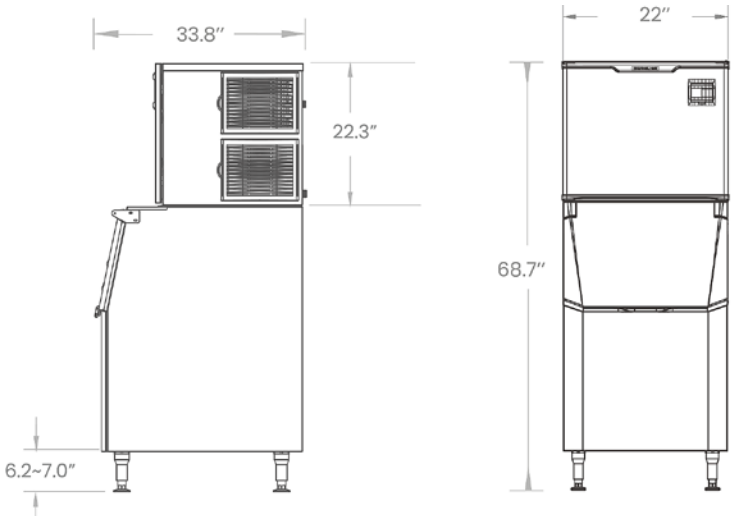

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)



- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency







Stackable Modular Cube Ice Machine

Features



- Stackable modular cube system sized for heavier foodservice demand.
- Produces up to 500 lb / 24 hr (225 kg) to cover daily drink, prep, and rush-period demand.
- Matched storage bin holds 440 lb (200 kg), giving staff a larger reserve between harvests.
- Makes full, half, or large cube options for different beverage styles, matching the ice style shown in the catalogue ice-shape guide.
- About 15 min per cycle helps replenish ice during steady service periods.

Size (Inch):	30 in W x 33.8 in D x 68.7 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (5.29 oz)
Rated Amp, Voltage, Power	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W
Certification	DOE, ETL, NSF, NRCan
Ice Production	500 lb / 24 hr (225 kg)
Max Storage Bin Capacity	440 lb (200 kg)
Ice Shape & Size	Cube: full / half / large
Ice Making Time / Cycle	Approx. 15 min / cycle
Ice Release Method	Bin drop / storage bin
Materials	SUS304/316/430 SS + plastic
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	143 lb + 80 lb (65 + 36 kg)
Warranty	3 Year Parts & Labour

- Air-cooled R290 refrigeration supports efficient output without water-cooled plumbing.
- Runs on 110 V / 60 Hz / 1 Ph with 11.26 A draw and 1113 W rated power.
- SUS304/316/430 SS + plastic construction supports frequent bin loading and daily foodservice use.
- Polyurethane foam with Cyclopentane (CFC-free) helps limit heat gain and maintain stored ice quality.
- DOE, ETL, NSF, NRCan compliance package supports commercial specification requirements.

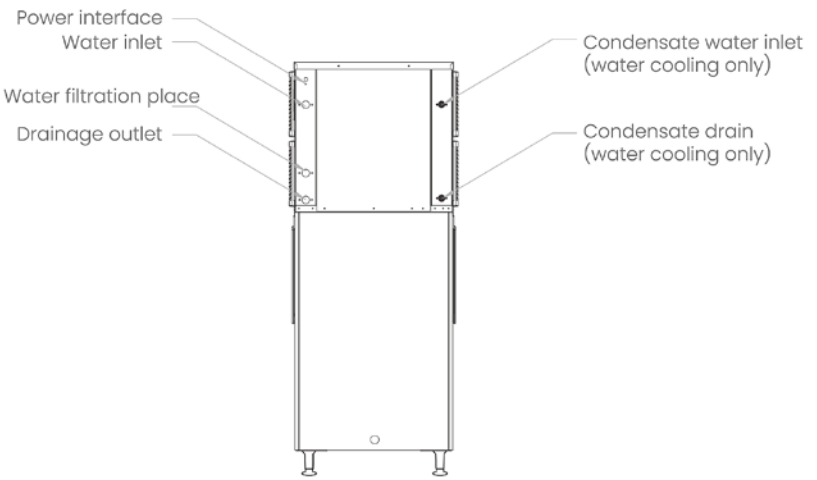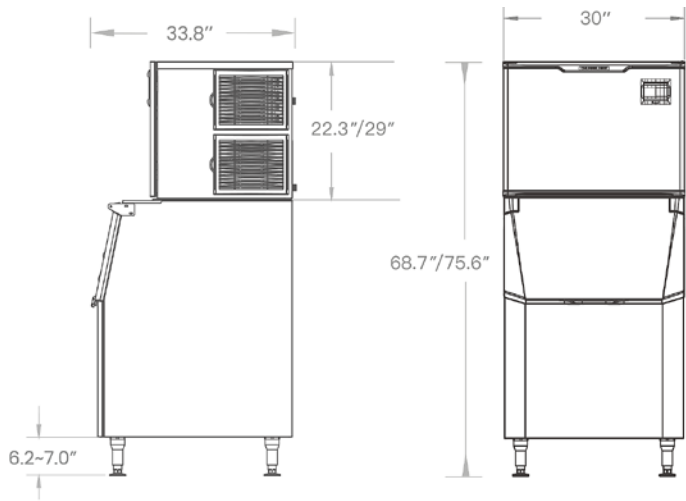

ACIM-500-440
Technical Drawing

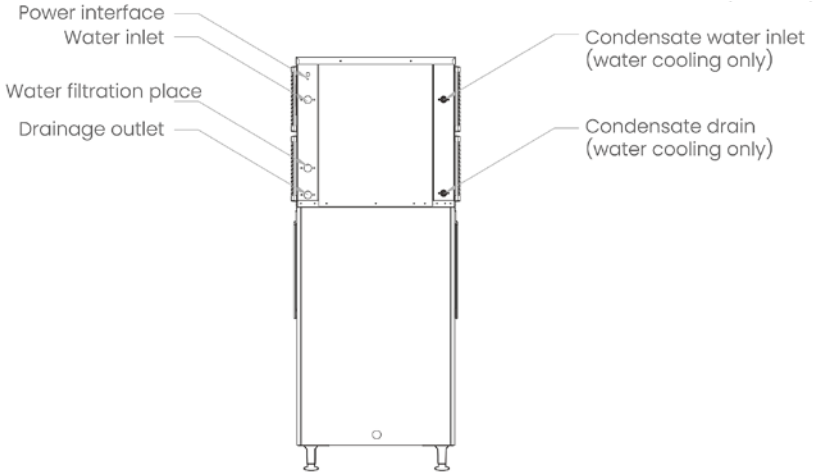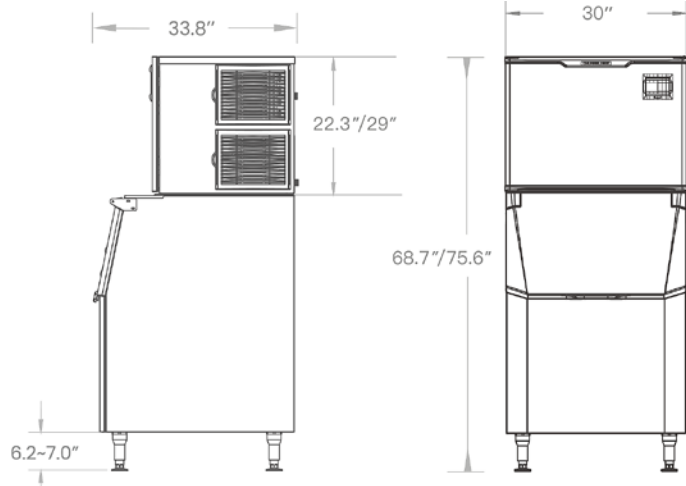

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)



- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency





Stackable Modular Cube Ice Machine

Features





- Stackable modular cube system sized for heavier foodservice demand.
- Produces up to 694 lb / 24 hr (315 kg) to cover daily drink, prep, and rush-period demand.
- Matched storage bin holds 440 lb (200 kg), giving staff a larger reserve between harvests.
- Makes full, half, or large cube options for different beverage styles, matching the ice style shown in the catalogue ice-shape guide.
- About 15 min per cycle helps replenish ice during steady service periods.

Size (Inch):	30 in W x 33.8 in D x 68.7 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (8.82 oz)
Rated Amp, Voltage, Power	71 A, 220 V / 60 Hz / 1 Ph, 1500 W
Certification	DOE, ETL, NSF
Ice Production	694 lb / 24 hr (315 kg)
Max Storage Bin Capacity	440 lb (200 kg)
Ice Shape & Size	Cube: full / half / large
Ice Making Time / Cycle	Approx. 15 min / cycle
Ice Release Method	Bin drop / storage bin
Materials	SUS304/316/430 SS + plastic
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	146 lb + 80 lb (66 + 36 kg)
Warranty	3 Year Parts & Labour

- Air-cooled R290 refrigeration supports efficient output without water-cooled plumbing.
- Runs on 220 V / 60 Hz / 1 Ph with 71 A draw and 1500 W rated power.
- SUS304/316/430 SS + plastic construction supports frequent bin loading and daily foodservice use.
- Polyurethane foam with Cyclopentane (CFC-free) helps limit heat gain and maintain stored ice quality.
- DOE, ETL, NSF compliance package supports commercial specification requirements.



ACIM-700-440
Technical Drawing

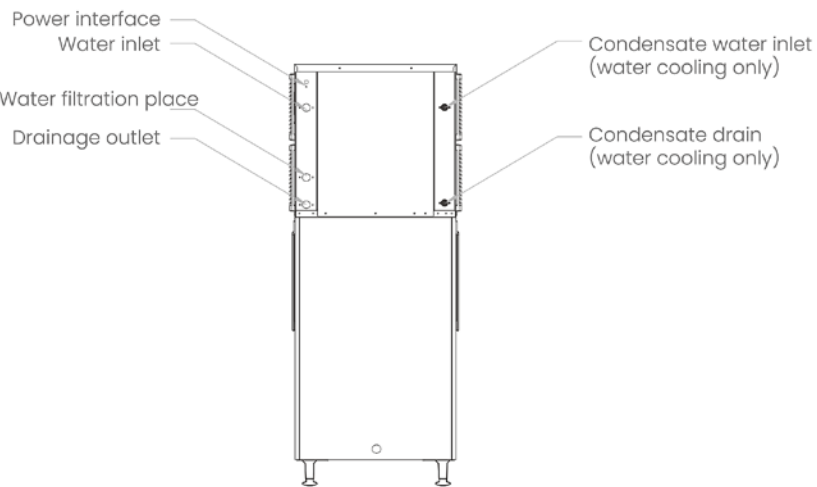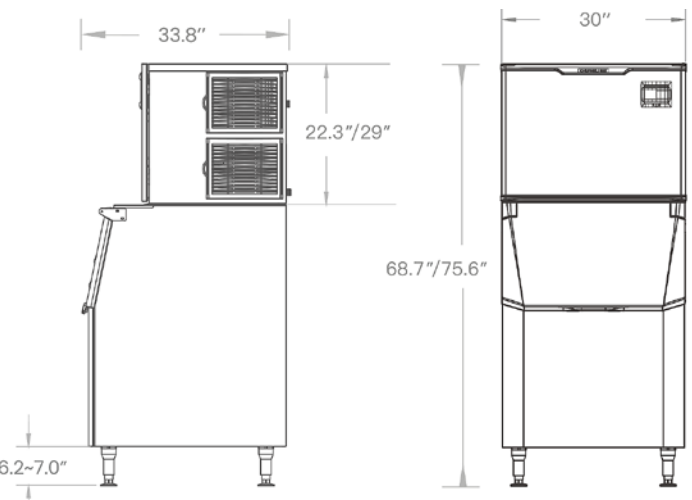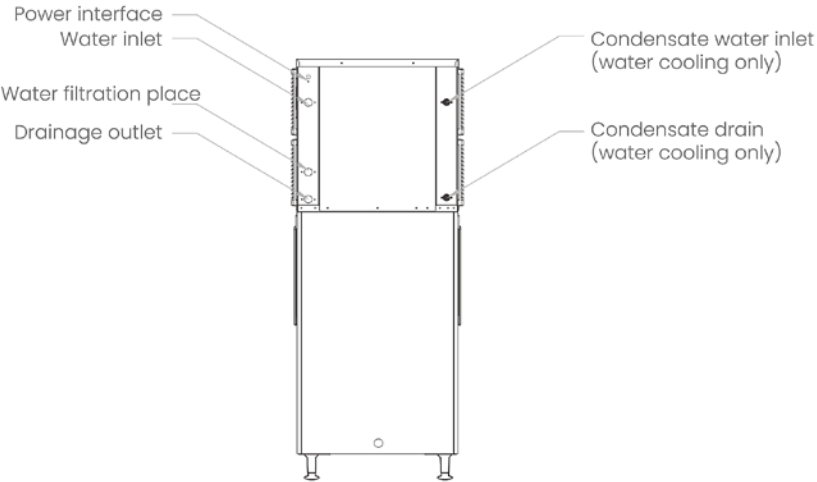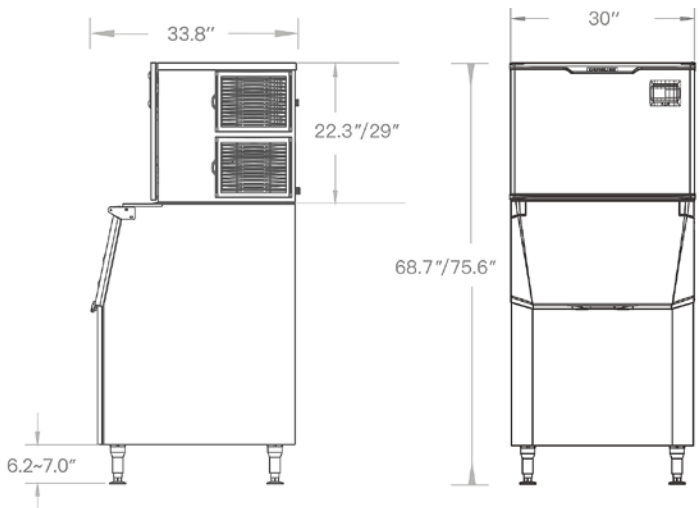

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)

- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency





Stackable Modular Cube Ice Machine

Features



- Stackable modular cube system sized for heavier foodservice demand.
- Produces up to 1000 lb / 24 hr (455 kg) to cover daily drink, prep, and rush-period demand.
- Matched storage bin holds 440 lb (200 kg), giving staff a larger reserve between harvests.
- Makes full, half, or large cube options for different beverage styles, matching the ice style shown in the catalogue ice-shape guide.
- About 15 min per cycle helps replenish ice during steady service periods.

Size (Inch):	30 in W x 33.8 in D x 75.6 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (10.69 oz)
Rated Amp, Voltage, Power	10 A, 220 V / 60 Hz / 1 Ph, 2150 W
Certification	DOE, ETL, NSF
Ice Production	1000 lb / 24 hr (455 kg)
Max Storage Bin Capacity	440 lb (200 kg)
Ice Shape & Size	Cube: full / half / large
Ice Making Time / Cycle	Approx. 15 min / cycle
Ice Release Method	Bin drop / storage bin
Materials	SUS304/316/430 SS + plastic
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	187 lb + 80 lb (85 + 36 kg)
Warranty	3 Year Parts & Labour



- Air-cooled R290 refrigeration supports efficient output without water-cooled plumbing.
- Runs on 220 V / 60 Hz / 1 Ph with 10 A draw and 2150 W rated power.
- SUS304/316/430 SS + plastic construction supports frequent bin loading and daily foodservice use.
- Polyurethane foam with Cyclopentane (CFC-free) helps limit heat gain and maintain stored ice quality.
- DOE, ETL, NSF compliance package supports commercial specification requirements.



ACIM-1000-440
Technical Drawing

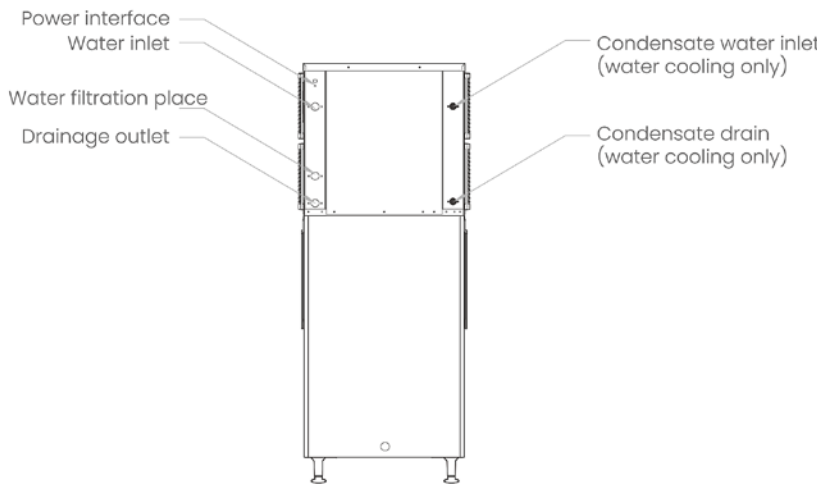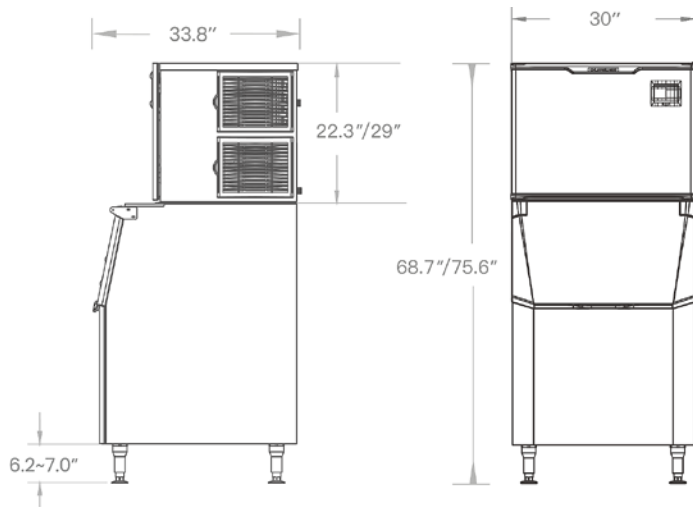

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/Button/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)

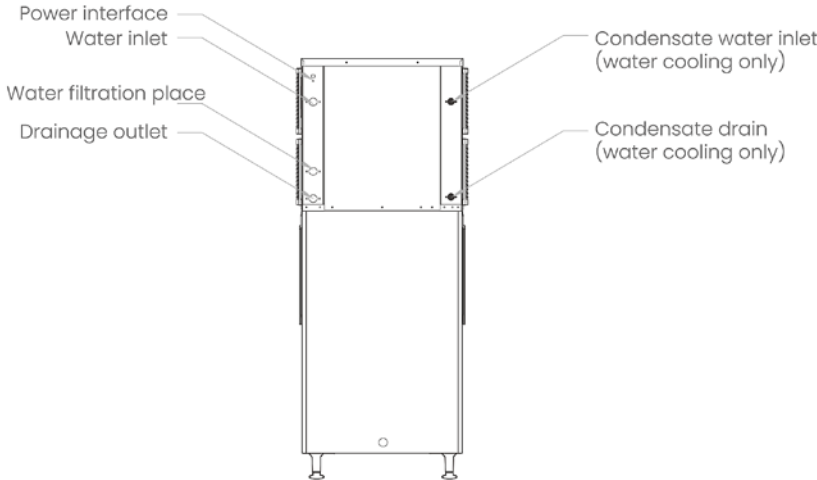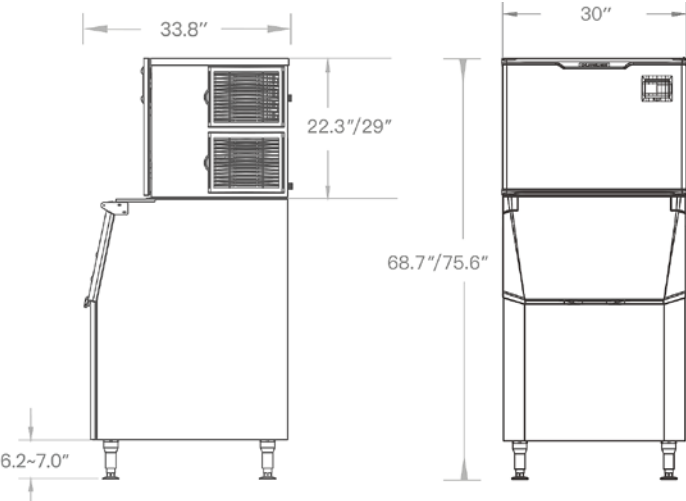

- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency







Stackable Modular Cube Ice Dispenser

Features


- Modular cube ice head paired with dispenser storage for controlled ice access.
- Produces up to 420 lb / 24 hr (190 kg) to cover daily drink, prep, and rush-period demand.
- Dispenser bin holds 132 lb (60 kg), keeping ice protected while still easy to serve.
- Makes full, half, or large cube options for different beverage styles, matching the ice style shown in the catalogue ice-shape guide.
- Controlled dispenser setup helps portion ice cleanly while the ice head cycles about 15 min per cycle.

Size (Inch):	22 in W x 33.7 in D x 75.8 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (4.94 oz)
Rated Amp, Voltage, Power	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W
Certification	DOE, ETL, NSF
Ice Production	420 lb / 24 hr (190 kg)
Max Storage Bin Capacity	132 lb (60 kg)
Ice Shape & Size	Cube: full / half / large
Ice Making Time / Cycle	Approx. 15 min / cycle
Ice Release Method	HD-130B dispenser
Materials	SUS304/316/430 SS + plastic
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	115 lb + 170 lb (52 + 77 kg)
Warranty	3 Year Parts & Labour

- Air-cooled R290 refrigeration supports efficient output without water-cooled plumbing.
- Runs on 110 V / 60 Hz / 1 Ph with 10.71 A total draw and 1010 W total rated power.
- SUS304/316/430 SS + plastic construction supports frequent bin loading and daily foodservice use.
- Polyurethane foam with Cyclopentane (CFC-free) helps limit heat gain and maintain stored ice quality.
- DOE, ETL, NSF compliance package supports commercial specification requirements.

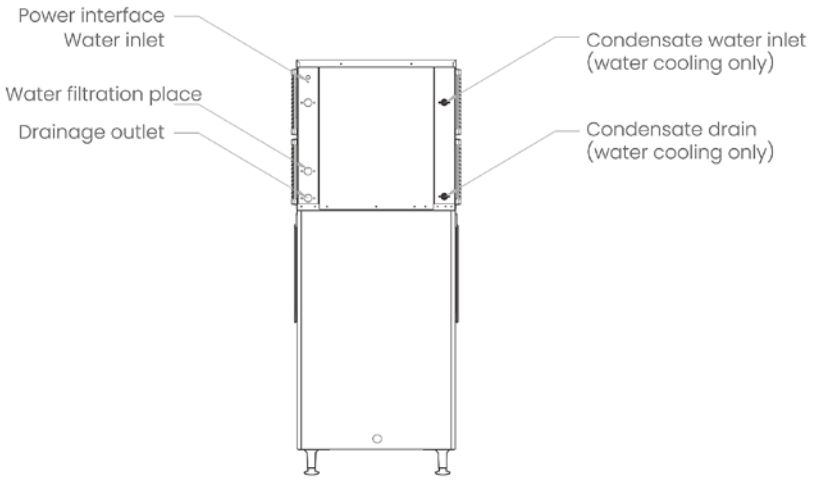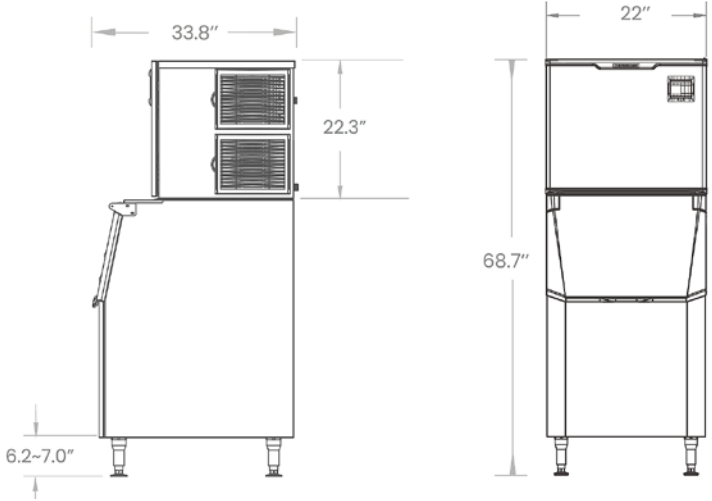

ACIMD-420-130
Technical Drawing

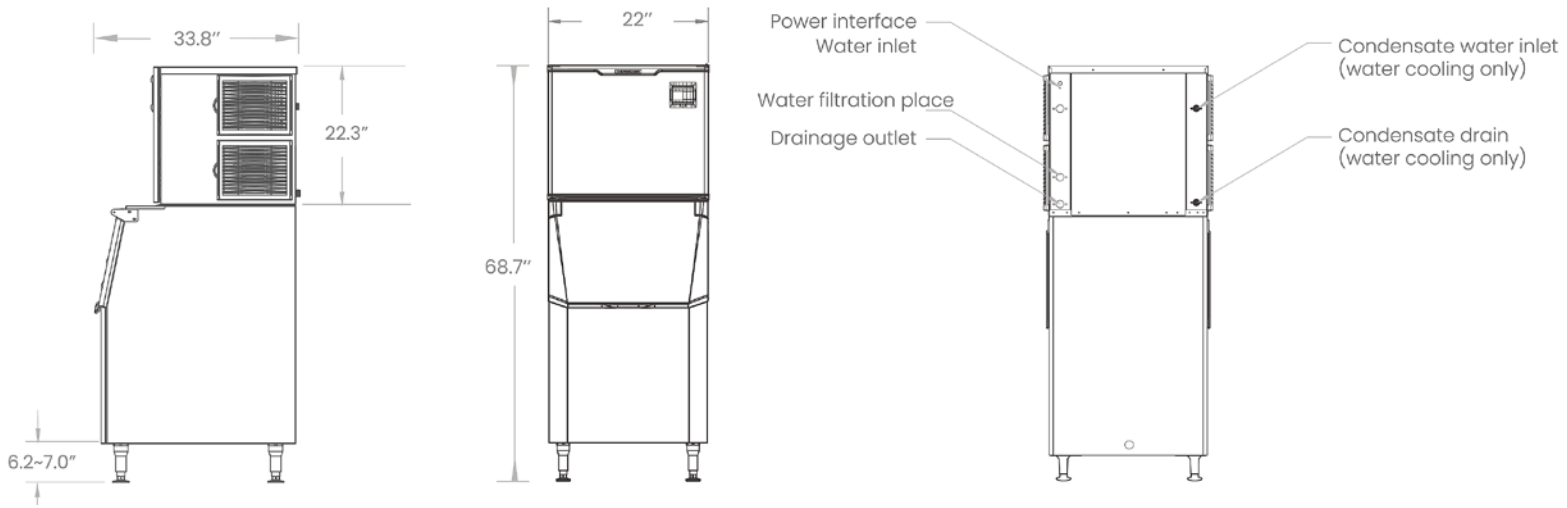

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/But-ton/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/But-ton/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)

Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922

Offers better energy efficiency, reducing operating costs

R290's high latent heat and low discharge temps improve efficiency

Intertek

Intertek

Intertek



Stackable Modular Nugget Ice Machine

Features


- Stackable nugget ice machine designed for high-volume soft ice production.
- Produces up to 550 lb / 24 hr (225 kg) to cover daily drink, prep, and rush-period demand.
- Matched storage bin holds 300 lb (136 kg), giving staff a larger reserve between harvests.
- Makes soft nugget ice for drinks, displays, and easy chewing, matching the ice style shown in the catalogue ice-shape guide.
- Fast-start nugget system begins delivering ice shortly after startup.

Size (Inch):	22 in W x 33.8 in D x 70.6 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (145 g)
Rated Amp, Voltage, Power	12 A, 110 V / 60 Hz / 1 Ph, 1180 W
Certification	DOE, ETL, NSF
Ice Production	550 lb / 24 hr (225 kg)
Max Storage Bin Capacity	300 lb (136 kg)
Ice Shape & Size	Nugget ice
Ice Making Time / Cycle	Approx. 1 min startup
Ice Release Method	Bin drop / storage bin
Materials	SUS430 exterior, SUS304 interior
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	176 lb + 73 lb (80 + 33 kg)
Warranty	3 Year Parts & Labour


- Air-cooled R290 refrigeration supports efficient output without water-cooled plumbing.
- Runs on 110 V / 60 Hz / 1 Ph with 12 A draw and 1180 W rated power.
- SUS430 exterior, SUS304 interior gives the nugget system durable, easy-clean commercial surfaces.
- Polyurethane foam with Cyclopentane (CFC-free) helps limit heat gain and maintain stored ice quality.
- DOE, ETL, NSF compliance package supports commercial specification requirements.



ACIM-550-300NG
Technical Drawing

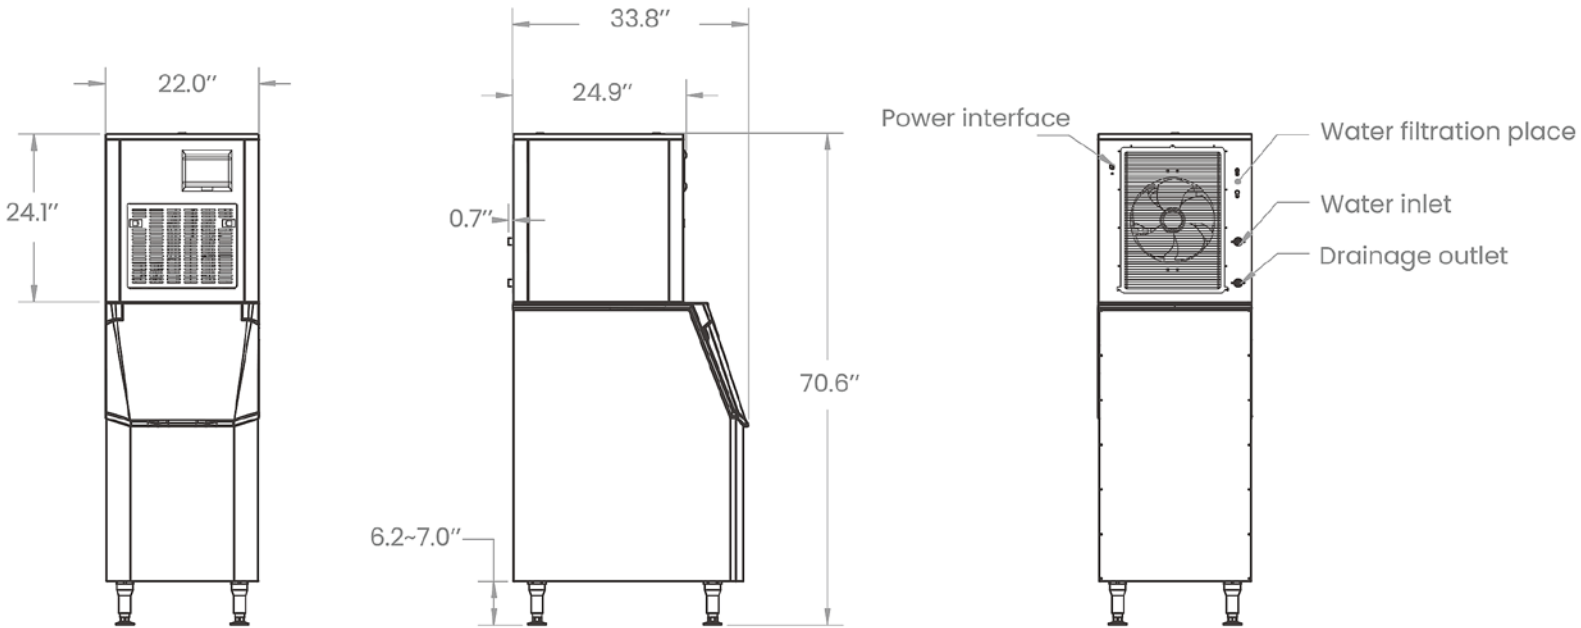

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/But-ton/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/But-ton/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)

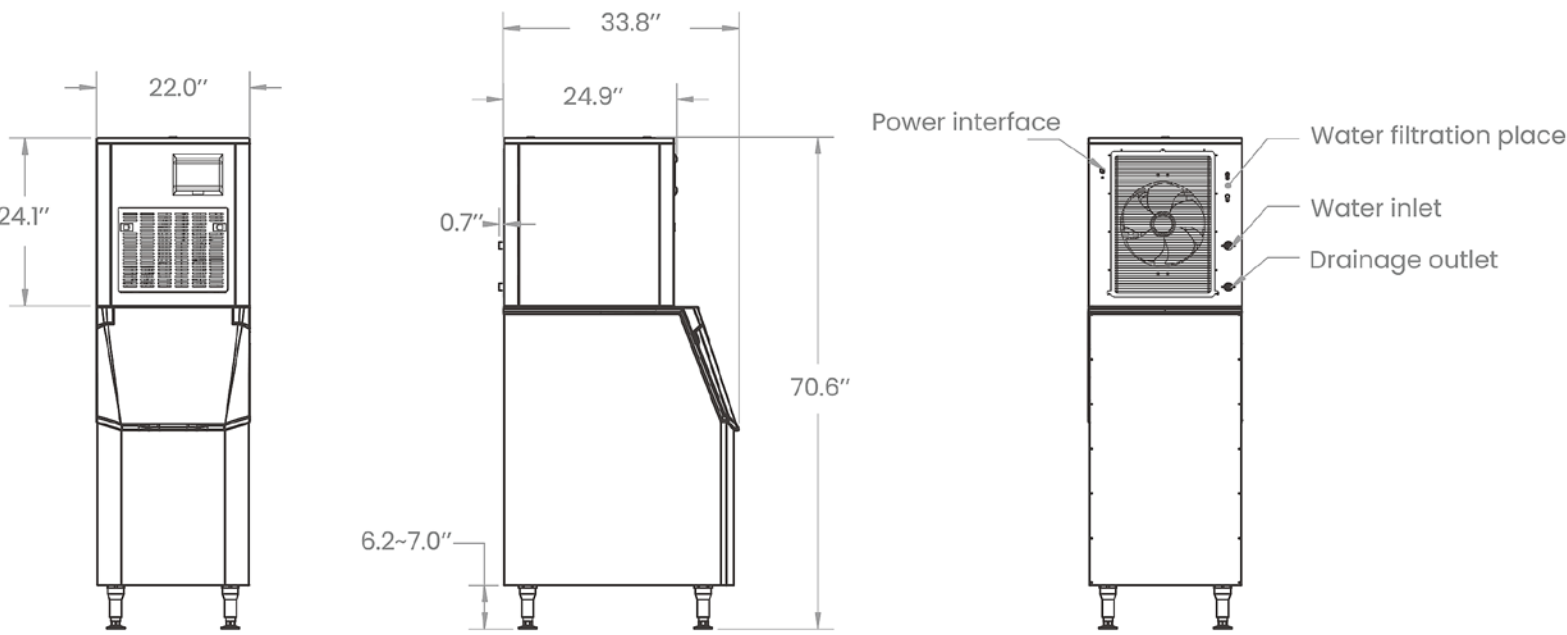

Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922

Offers better energy efficiency, reducing operating costs

R290's high latent heat and low discharge temps improve efficiency

Intertek


Intertek

Intertek



Countertop Nugget / Mineral Ice & Water Dispenser

ACIM-220-WN
Technical Drawing

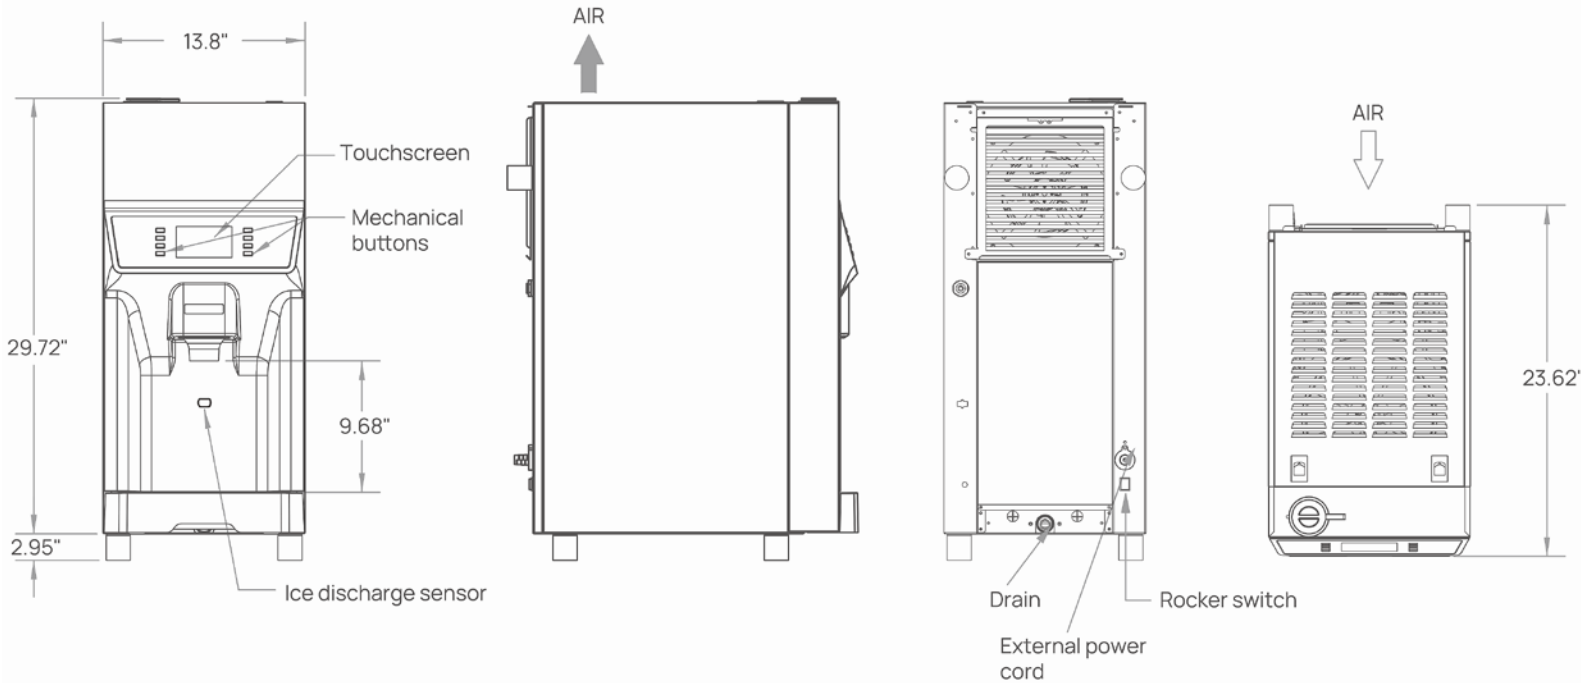


Countertop Nugget / Mineral Ice & Water Dispenser

Features

- Countertop ice-and-water dispenser for compact self-serve stations.
- Produces up to 220 lb / 24 hr (100 kg) to cover daily drink, prep, and rush-period demand.
- Matched storage bin holds 6.2 lb (2.8 kg), giving staff a larger reserve between harvests.
- Makes nugget/mineral ice pieces in the 6.4-17 mm range, matching the ice style shown in the catalogue ice-shape guide.
- 4.1 in touchscreen, push-button use, and optional infrared dispensing simplify service.

- Sealed air-cooled R290 refrigeration helps shield the ice path from outside contamination.
- Runs on 110 V / 60 Hz / 1 Ph with 4.6 A draw and 470 W rated power.
- 304 SS body + resin front creates a clean service-counter look with commercial-grade body panels.
- Automatic cleaning, UV LED support, and removable contact parts simplify sanitation routines.
- DOE, ETL, NSF compliance package supports commercial specification requirements.

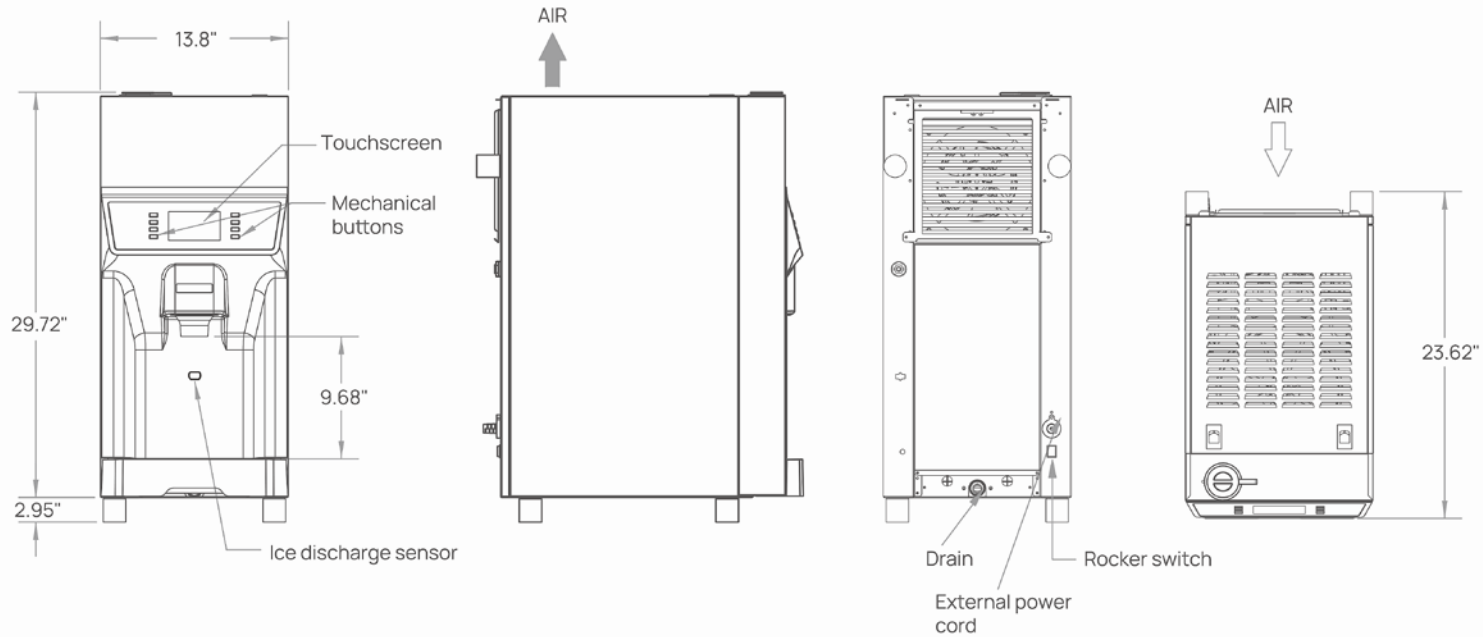

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/But-ton/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/But-ton/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)



- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency






Countertop Nugget / Mineral Ice & Water Dispenser

Features


- Countertop ice-and-water dispenser for compact self-serve stations.
- Produces up to 366 lb / 24 hr (166 kg) to cover daily drink, prep, and rush-period demand.
- Matched storage bin holds 16.5 lb (7.5 kg), giving staff a larger reserve between harvests.
- Makes nugget/mineral ice pieces in the 6.4-17 mm range, matching the ice style shown in the catalogue ice-shape guide.
- 4.1 in touchscreen, push-button use, and optional infrared dispensing simplify service.

Size (Inch):	18.2 in W x 23.62 in D x 37.95 in H
Condenser Type	Air-Cooled
Refrigerant	R290 (115 g)
Rated Amp, Voltage, Power	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W
Certification	DOE, ETL, NSF
Ice Production	366 lb / 24 hr (166 kg)
Max Storage Bin Capacity	16.5 lb (7.5 kg)
Ice Shape & Size	Nugget/mineral (6.4-17 mm)
Ice Making Time / Cycle	Approx. 15 min startup
Ice Release Method	Touch / button / IR option
Materials	304 SS body + resin front
Insulation	Polyurethane foam
Foam Blowing Agent	Cyclopentane (CFC-free)
Net Weight	151 lb (68.5 kg)
Warranty	3 Year Parts & Labour

- Sealed air-cooled R290 refrigeration helps shield the ice path from outside contamination.
- Runs on 110 V / 60 Hz / 1 Ph with 6.3 A draw and 640 W rated power.
- 304 SS body + resin front creates a clean service-counter look with commercial-grade body panels.
- Automatic cleaning, UV LED support, and removable contact parts simplify sanitation routines.
- DOE, ETL, NSF compliance package supports commercial specification requirements.

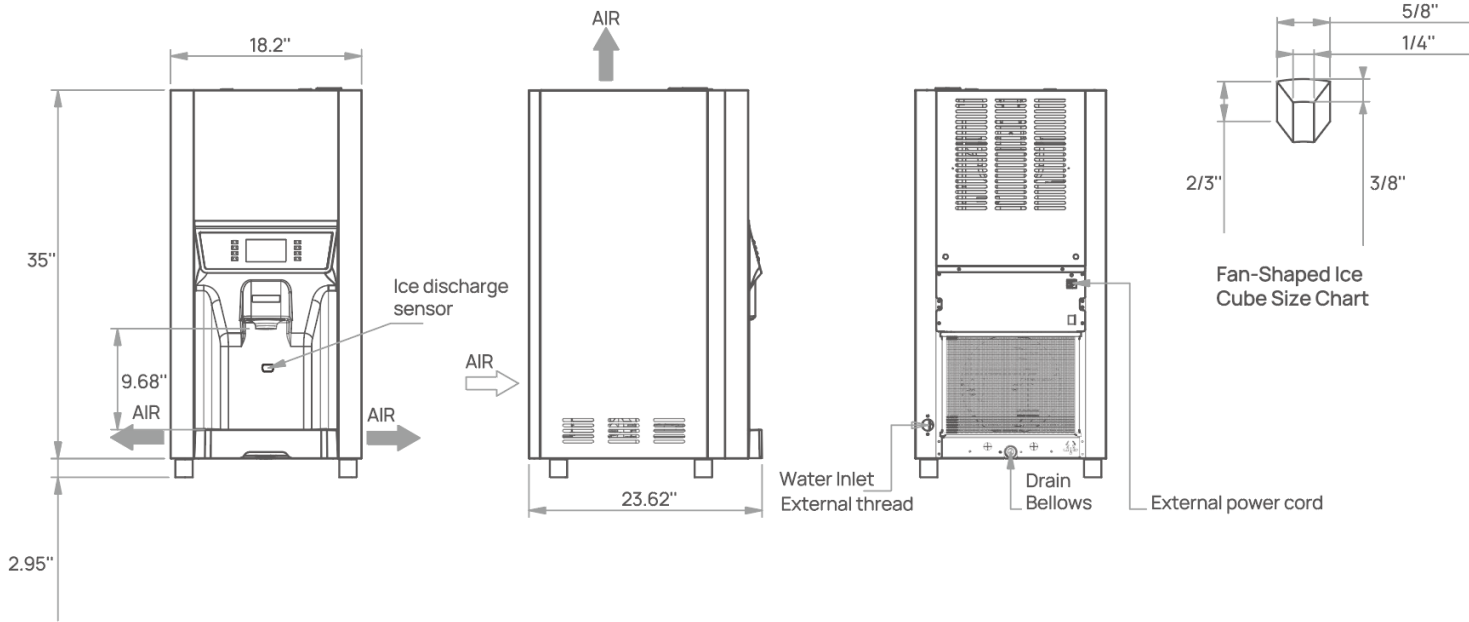

ACIM-366-WN
Technical Drawing

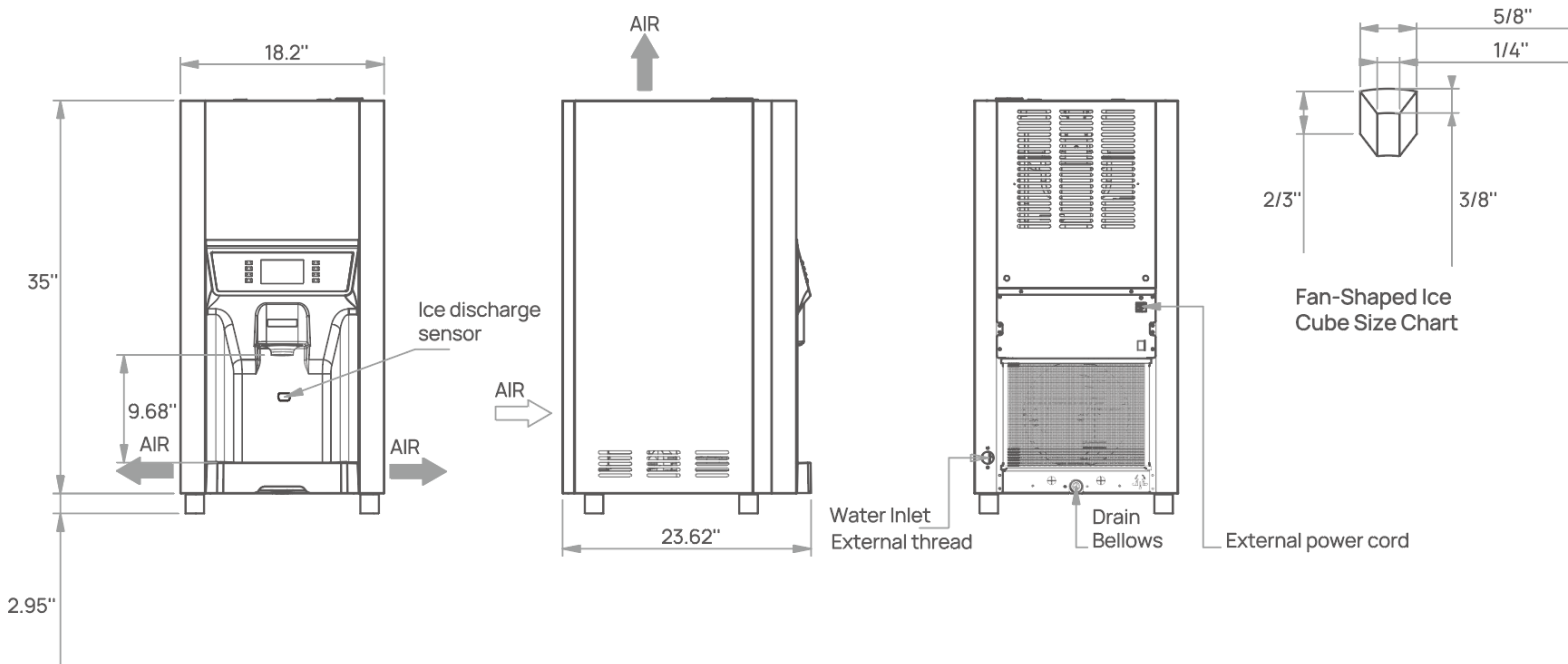

Model	External Dimensions (")	Condenser	Amp, Voltage, Power	Ice Production	Bin Capacity	Ice Shape & Size	Ice Making Time	Ice Release Method	Materials	Insulation	Foam Blowing Agent	Net Weight
ACIM-80-33	19.69W x 17.72D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 350 W	80 lb / 24 hr (36 kg)	33 lb (15 kg)	Full/Half Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	80 lb (36 kg)
ACIM-120-40	19.69W x 23.23D x 35.43H	Air-Cooled	3.5 A, 110 V / 60 Hz / 1 Ph, 400 W	120 lb / 24 hr (55 kg)	40 lb (18 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	99 lb (45 kg)
ACIM-210-80	26W x 26.96D x 38.18H	Air-Cooled	5.8 A, 110 V / 60 Hz / 1 Ph, 526 W	210 lb / 24 hr (95 kg)	80 lb (36 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Built-in Bin	304 SS, ABS, PE liner, galv. rear	Polyurethane foam	Cyclopentane (CFC-free)	276 lb (125 kg)
ACIM-350-440	22W x 33.8D x 68.7H	Air-Cooled	8.51 A, 110 V / 60 Hz / 1 Ph, 780 W	350 lb / 24 hr (160 kg)	300 lb (136 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	188 lb (85 kg)
ACIM-500-440	30W x 33.8D x 68.7H	Air-Cooled	11.26 A, 110 V / 60 Hz / 1 Ph, 1113 W	500 lb / 24 hr (225 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	223 lb (101 kg)
ACIM-700-440	30W x 33.8D x 68.7H	Air-Cooled	71 A, 220 V / 60 Hz / 1 Ph, 1500 W	694 lb / 24 hr (315 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	226 lb (102 kg)
ACIM-1000-440	30W x 33.8D x 75.6H	Air-Cooled	10 A, 220 V / 60 Hz / 1 Ph, 2150 W	1000 lb / 24 hr (455 kg)	440 lb (200 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Drop Bin	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	267 lb (121 kg)
ACIMD-420-130	22W x 33.7D x 75.8H	Air-Cooled	10.71 A, 110 V / 60 Hz / 1 Ph, 1010 W	420 lb / 24 hr (190 kg)	132 lb (60 kg)	Full/Half/ Large Cube	Approx. 15 min / cycle	Dispenser	SUS304/316/430 SS + plastic	Polyurethane foam	Cyclopentane (CFC-free)	285 lb (129 kg)
ACIM-550-300NG	22W x 33.8D x 70.6H	Air-Cooled	12 A, 110 V / 60 Hz / 1 Ph, 1180 W	550 lb / 24 hr (225 kg)	300 lb (136 kg)	Nugget	Approx. 1 min startup	Drop Bin	SUS430 exterior, SUS304 interior	Polyurethane foam	Cyclopentane (CFC-free)	249 lb (113 kg)
ACIM-220-WN	13.8W x 23.62D x 32.67H	Air-Cooled	4.6 A, 110 V / 60 Hz / 1 Ph, 470 W	220 lb / 24 hr (100 kg)	6.2 lb (2.8 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/But-ton/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	101 lb (46 kg)
ACIM-366-WN	18.2W x 23.62D x 37.95H	Air-Cooled	6.3 A, 110 V / 60 Hz / 1 Ph, 640 W	366 lb / 24 hr (166 kg)	16.5 lb (7.5 kg)	Nugget 6.4-17 mm	Approx. 15 min startup	Touch/But-ton/IR	304 SS body + resin front	Polyurethane foam	Cyclopentane (CFC-free)	151 lb (68.5 kg)

- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency

