

## R1G-25-WS




Size (Inch):	25.00 x 25.98 x 63.78
Capacity:	12 Cubic Ft.
Temperature:	33~41°F
Voltage:	115/60/1
Amperage:	3.0
Plug Type:	5-15P
Compressor HP:	1/5
BTU:	1670
Charge Oz:	3.0
Shipping Size (Inch):	26.57 x 28.94 x 68.70
Weight:	<b>Net:</b> 99 kg, <b>Gross:</b> 112 kg
Warranty	2 Year & 5 Compressor


### Merchandiser Cooler 25" with Backlit Sign


#### Features




#### Efficient & Eco-Friendly


 R290 is efficient and eco-friendly, saving 30-50% energy versus HFC systems with less refrigerant


 Triple pane heated glass doors with thermal insulating film prevents condensation


 High-quality cabinet with CFC-free polyurethane foam insulation for maximum energy efficiency.

 Magnetic door gaskets ensure a tight, efficient seal and can be easily repaired without tools.


#### Quality Assurance


 High-efficiency evaporators paired with oversized condensing units and automatic evaporation


 Digital temperature readout with electronic thermostatic control and LED interior lighting.


 Positive air flow with forced air movement throughout the cabinet.

#### Robust Construction

 White and black baked enamel steel finish inside and out, with a painted steel interior base

 Heavy-duty polyethylene coated adjustable wire shelves.


 Ergonomically designed, self-closing locking glass doors with easy grab handles.

 Plastic upper sign panel with light and heavy-duty on-off brake casters.



## R1G-25-WS

### Technical Drawing

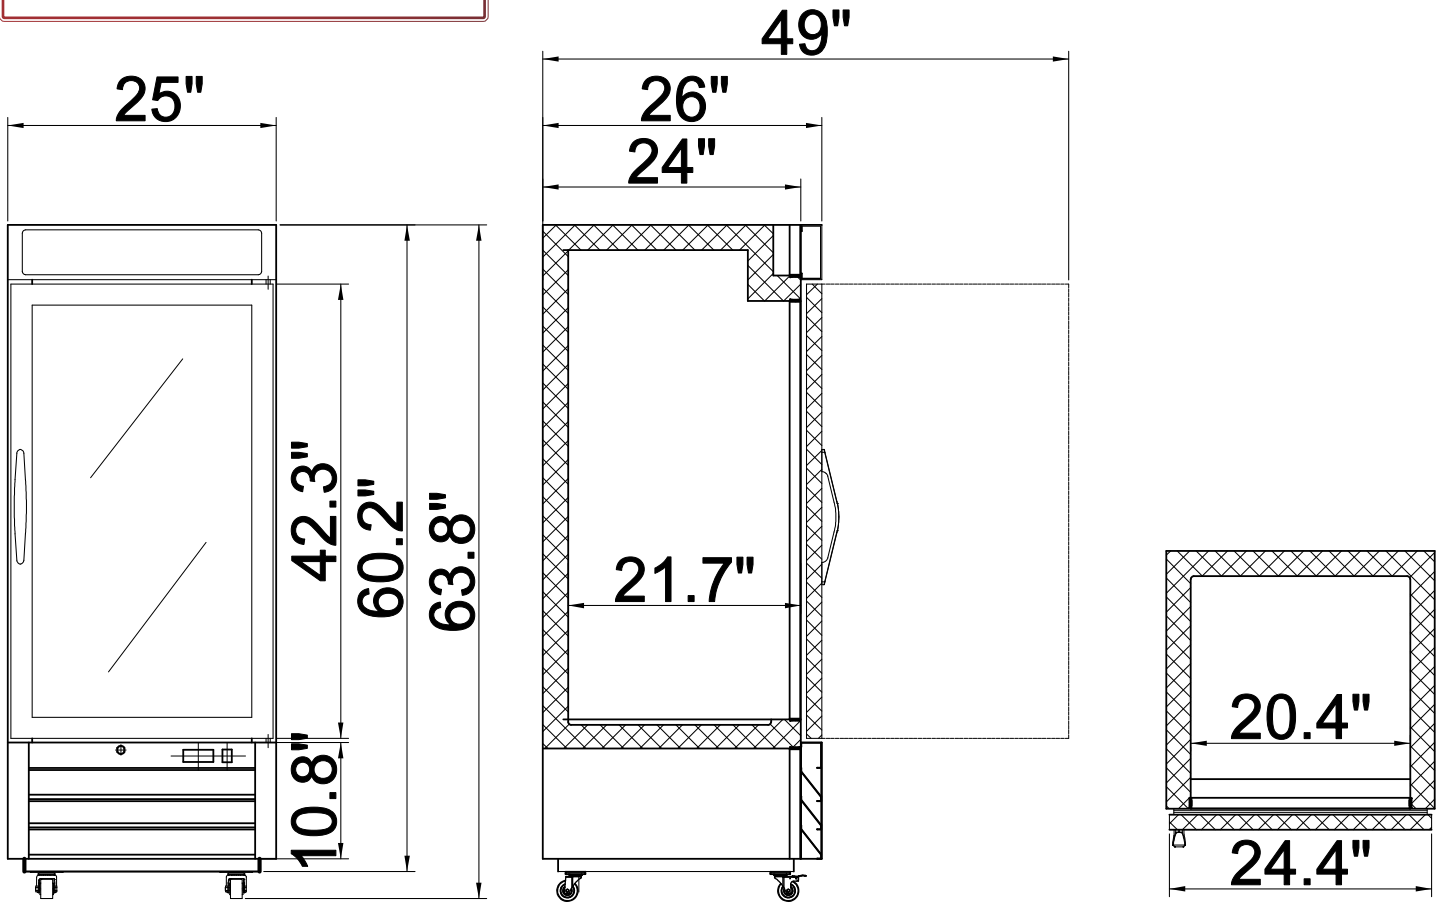

Models	Product Size (")	Capacity	Amps	Power	BTU	Charge Oz	N.W	Shipping Size (")	G.W	Doors	Temp
F1G-27B	26.77 x 31.89 x 81.5	23 cu ft	8.0	1/2	2000	3.88	137 kg	28.35 x 34.84 x 84.65	155 kg	1	-10~0°F
F1G-25-WS	25.00 x 25.98 x 63.78	12 cu ft	5	1/2	2000	3.7	104 kg	26.57 x 28.94 x 68.70	117 kg	1	-10~0°F
F1G-27-WS	26.77 x 31.89 x 81.5	23 cu ft	8.0	1/2	2000	3.88	137 kg	28.35 x 34.84 x 84.65	155 kg	1	-10~0°F
F2G-54B	53.94 x 31.89 x 81.5	48 cu ft	9.0	1	3650	5.29	243 kg	55.51 x 34.84 x 84.65	263 kg	2	-10~0°F
F2G-54-WS	53.94 x 31.89 x 81.5	48 cu ft	9.0	1	3650	5.29	243 kg	55.51 x 34.84 x 84.65	263 kg	2	-10~0°F
F3G-81B	80.98 x 31.89 x 81.5	72 cu ft	9.0	1-1/4	4500	5.29	315 kg	82.56 x 34.84 x 84.65	351 kg	3	-10~0°F
F3G-81-WS	80.98 x 31.89 x 81.5	72 cu ft	9.0	1-1/4	4500	5.29	315 kg	82.56 x 34.84 x 84.65	351 kg	3	-10~0°F
R1G-27B	26.77 x 31.89 x 81.5	23 cu ft	3.0	1/5	1670	3.0	132 kg	28.35 x 34.84 x 84.65	150 kg	1	33~41°F
R1G-25-WS	25.00 x 25.98 x 63.78	12 cu ft	3.0	1/5	1670	3.0	99 kg	26.57 x 28.94 x 68.70	112 kg	1	33~41°F
R1G-27-WS	26.77 x 31.89 x 81.5	23 cu ft	3.0	1/5	1670	3.0	132 kg	28.35 x 34.84 x 84.65	150 kg	1	33~41°F
R2G-40-WSSL	39.53 x 30.71 x 81.5	36 cu ft	4.5	1/4	2380	3.7	188 kg	41.14 x 31.89 x 82.28	206 kg	Sliding	33~41°F
R2G-54B	53.94 x 31.89 x 81.5	48 cu ft	4.5	1/4	2380	3.7	222 kg	55.51 x 34.84 x 84.65	251 kg	2	33~41°F
R2G-54-WS	53.94 x 30.71 x 81.5	48 cu ft	4.5	1/4	2380	3.7	223 kg	55.51 x 31.89 x 84.65	244 kg	2	33~41°F
R2G-54-WSSL	53.94 x 31.89 x 81.5	48 cu ft	4.5	1/4	2380	3.7	222 kg	55.51 x 34.84 x 84.65	251 kg	Sliding	33~41°F
R3G-81B	80.98 x 31.89 x 81.5	72 cu ft	7.5	1/2	3200	5.29	318 kg	82.56 x 34.84 x 84.65	354 kg	3	33~41°F
R3G-81-WS	80.98 x 31.89 x 81.5	72 cu ft	7.5	1/2	3200	5.29	318 kg	82.56 x 34.84 x 84.65	354 kg	3	33~41°F
R3G-81-WSSL	80.98 x 31.89 x 81.5	72 cu ft	7.5	1/2	3200	5.29	318 kg	82.56 x 34.84 x 84.65	354 kg	Sliding	33~41°F



- Has a GWP of just 3, compared to R134a's 1430 and R404A's 3922
- Offers better energy efficiency, reducing operating costs
- R290's high latent heat and low discharge temps improve efficiency

